



Project Name: _____
Product Number: _____
Quantity: _____

VERSA-CHILL REACH IN FREEZERS

GENERAL

Using steel construction, these stand up reach in coolers are available in 3 sizes to meet your needs.

Cabinet Construction

The exterior sides, front covers, and top panel are covered in 24 gauges, type 430 stainless steel.

The interior walls are covered in 22 gauge, type 430 stainless steel and the floors are covered in 24 gauge, type 304 stainless steel.

The inside corners are rounded for easy cleaning.

The units come with adjustable PVC coated shelves.

The entire unit is built using a high density

Polyurethane insulation that is applied in place.

Equipped with LED interior lighting, and digital temperature control system.

Doors

Glass doors with recessed handles for smoother front and reduced space requirements. Doors equipped with safety door locks.

Self-closing doors equipped with "stay-open" feature when opened past 90 degrees.

Magnetic door gaskets.

Refrigeration

Oversized factory balanced system designed to hold -8 to 0 degrees Fahrenheit.

The refrigeration system uses R404A that is CFC and HCFC free. Condensor unit is easily accessible for routine cleaning and maintenance.

Electrical

Units come factory wired and ready to connect with 115/60/1 phase, 15 amp dedicated plug and cord or 208-230/3 phase (F3-82GDSVC) 20 amp dedicated plug and cord.



F1-27GDSVC



F2-54GDSVC






F3-82GDSVC



Equipment for the Foodservice Industry

MODEL	F1-27GDSVC	F2-54GDVC	F3-82GDVC
EXTERNAL DIMENSIONS			
Overall Width inches / mm	27 / 685	54.4 / 1382	81.9 / 2080
Overall Depth inches / mm	31.5 / 800	31.5 / 800	31.5 / 800
Overall Height inches / mm	84 / 2120	84 / 2120	84 / 2120
Number of Doors	1	2	3
INTERNAL DIMENSIONS			
Capacity Cubic ft. / litres	22 / 610	46 / 1320	75 / 2110
Internal Width inches / mm	22.2 / 564	49.7 / 1262	77.1 / 1958
Internal Depth inches / mm	25.2 / 640	25.2 / 640	25.2 / 640
Internal Height inches / mm	60 / 1524	60 / 1524	60 / 1524
Number of shelves	4	8	12
ELECTRICAL			
Full Load Amperes 115/60/1	7.5	12	
Full Load Amperes 208-230V/3			5.5
Cord Length Feet / Meters	8.5 / 2.6	8.5 / 2.6	8.5 / 2.6
Plug type	NEMA 5-15	NEMA 5-15	NEMA L 14-20P
REFRIGERATION DATA			
Refrigerant	R404A	R404A	R404A
Horsepower	1 / 2	3 / 4	1 1/2
WEIGHT (lbs/kg)	265 / 120	419 / 190	441 / 200

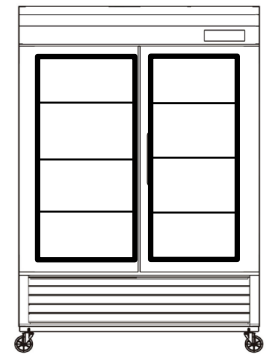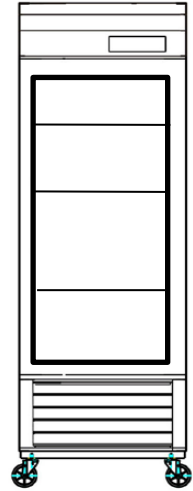

WARRANTY INFORMATION

One year parts and labour.

Five years on compressor.



L 14-20P



5-15P



EFI Sales Ltd.
Corporate Office
26895 Gloucester Way
Langley, BC V4W 3Y3

Distribution Facilities:
Toronto, ON
Langley, BC

Specifications subject to change without notice.

www.efifoodequip.com