


LARGE GREASE INTERCEPTOR



5200

10 GAUGE LARGE CAPACITY GREASE INTERCEPTOR WITH NON-SKID GASKETED COVER, INTERNAL BAFFLE, REMOVABLE FLOW CONTROL AND NO-HUB INLET/OUTLETS

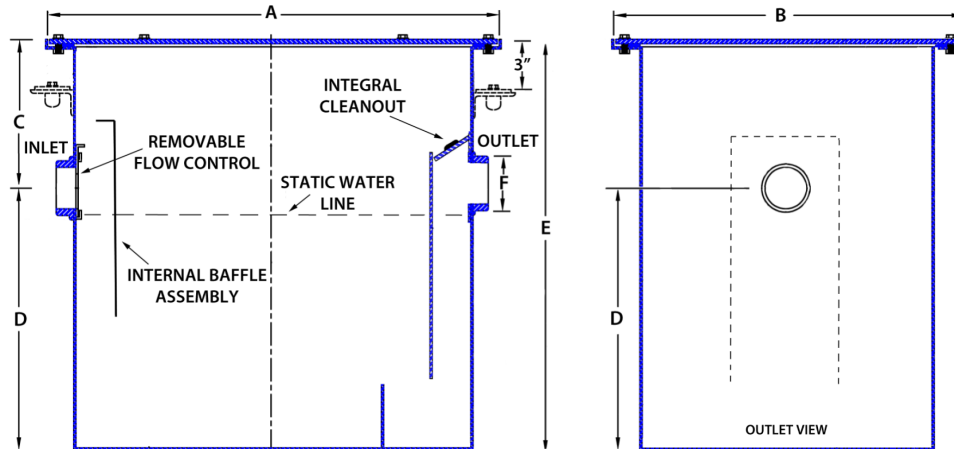

MODEL	FLOW RATE (GPM)	GREASE CAPACITY (LBS)	A (IN)	B (IN)	C (IN)	D (IN)	E (IN)	F (IN)	SHIPPING WEIGHT (LBS)
5200-075	75	150	42	28	6	26	32	4	350
5200-100	100	200	55	37	8	26	34	4	520
5200-125	125	250	58	38	8	28	36	4	600
5200-150	150	300	61	39	8	30	38	4	700
5200-200	200	400	70	44	10	34	44	4	1050
5200-250	250	500	75	46	10	38	48	4	1160
5200-300	300	600	77	49	12	40	52	4	1240
5200-350	350	700	80	51	12	40	52	6	1360
5200-400	400	800	84	56	14	44	58	6	1540
5200-500	500	1000	92	61	14	54	68	6	2150
5200-600	600	1200	102	74	14	62	76	8	3000
5200-750	750	1500	108	76	14	66	80	8	3280

Larger sizes available - POA

OPTIONS

Suffix	Description
-24	ANCHOR FLANGE
-26	ANCHOR FLANGE W/ CLAMP DEVICE
-27	SEDIMENT BUCKET
-28	INJECTION PORT
-AC	ALUMINUM COVERS

OPTIONS

Suffix	Description
-DI	DUAL INLETS
-HD	HEAVY DUTY COVERS
-HLA	HIGH LEVEL ALARM
-SS	ALL STAINLESS STEEL
-XT	EXTENSION (SPECIFY 'H')

Bolt-On Extensions Available

Design and dimensions are subject to modifications