

PROJECT :	
MODEL # :	
ITEM # :	QTY :
AVAILABLE W/H :	
APPROVAL :	

Mega Top Sandwich Prep Tables



STANDARD FEATURES

BACK MOUNT COMPRESSOR

THE BACK MOUNTED COMPRESSOR PROVIDES EASY ACCESS FOR MAINTENANCE

STAINLESS STEEL INTERIOR AND EXTERIOR

QUALITY STAINLESS STEEL HELPS MINIMIZE DENTS, SCRATCHES, AND RUST

CFC FREE HIGH DENSITY CELL POLYURETHANE INSULATION

5" DIAMETER SWIVEL CASTERS WITH FRONT BRAKES

SELF-CLOSING DOORS WITH RECESSED DOOR HANDLES

OUR RECESSED DOOR HANDLES HELP PREVENT SHIPPING DAMAGE AND BREAKAGE

DURABLE DOOR GASKET WITH EASY REPLACEMENT

FOAM INSULATED STAINLESS STEEL ROLL-BACK LID

TWO STEP LID STOPS FOR SAFETY

EPOXY COATED WIRE SHELVES WITH ADJUSTABLE SHELVING HEIGHT

STANDARD 9 1/2" REVERSIBLE CUTTING BOARD

STAINLESS STEEL FOOD CATCH PAN

ACCOMMODATES 6" DEEP PANS

1/6 SIZE PLASTIC PANS INCLUDED

BAMT28 MODEL INCLUDES 1/6 AND 1/9 SIZED PANS

FIELD REVERSIBLE DOOR (ADDITIONAL KIT REQUIRED)

BAMT28 MODELS ONLY

OPTIONAL DRAWER MODELS AVAILABLE



WARRANTY
3 Years Parts and Labor
5 Years on Compressor in USA


APPROVALS:

AVAILABLE AT:

VER093015

Mega Top Sandwich Tables

Product plan View

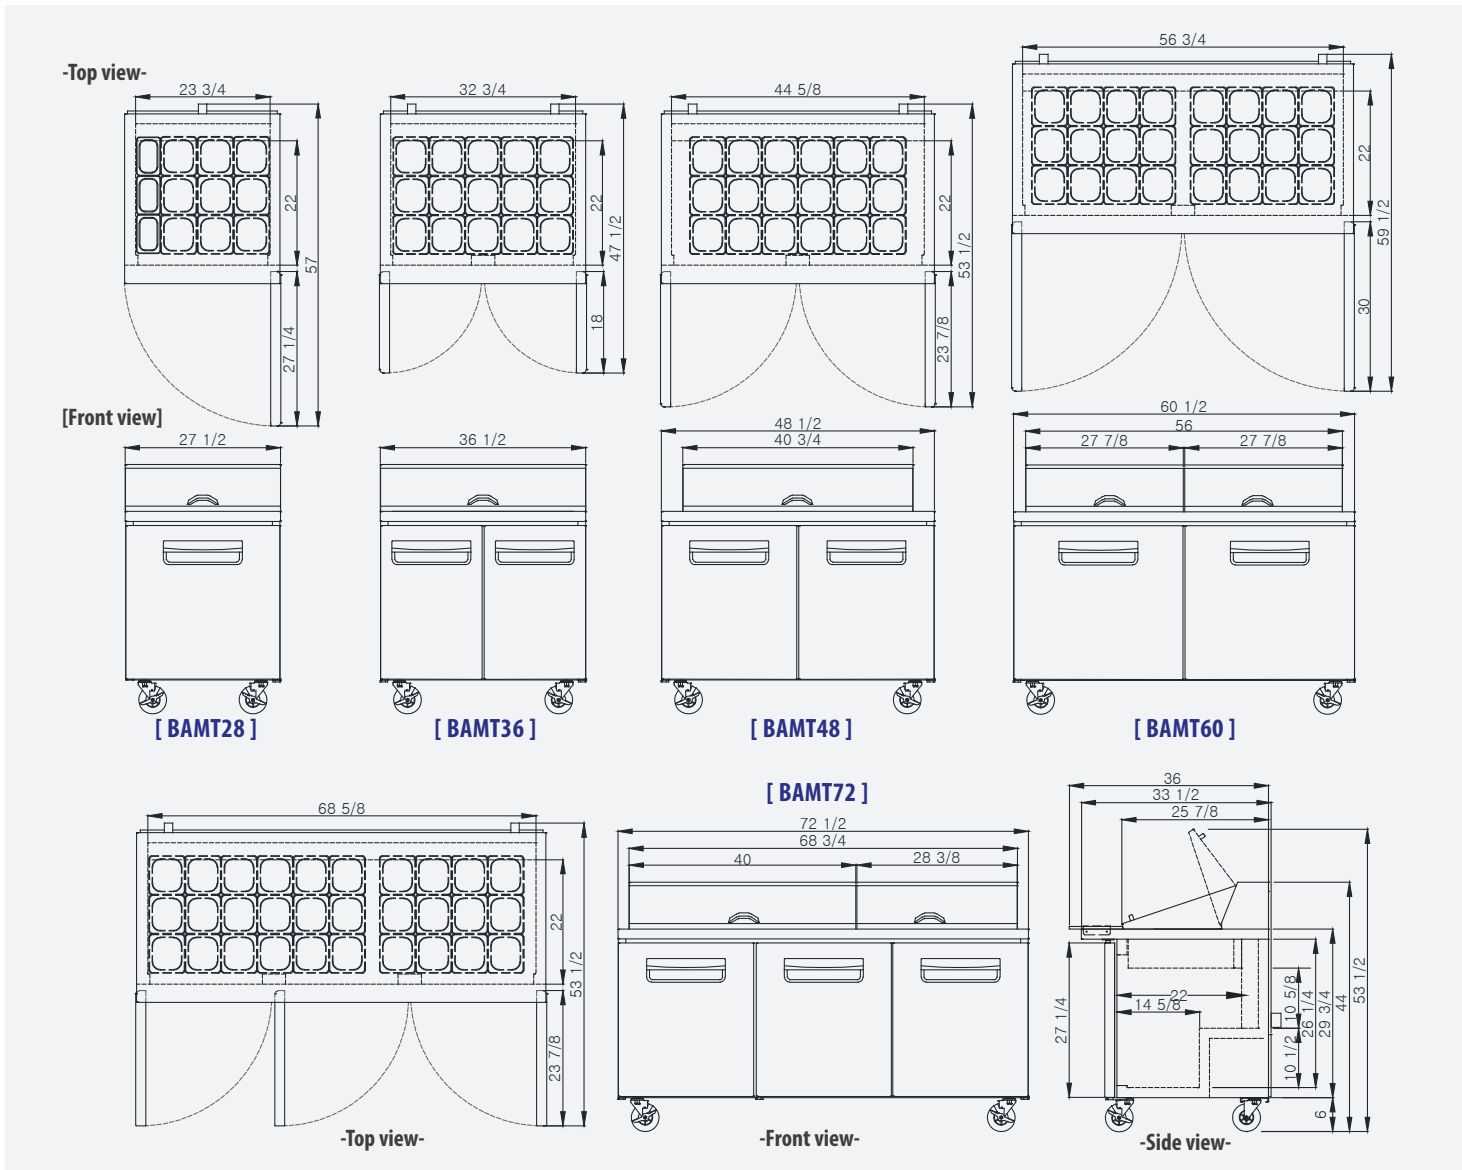

Product Specification

Mega Top Sandwich Prep Tables Refrigerator

Model	Product Description			Temperature Range			Cord Length (ft/m)				
	MegaTop Sandwich Prep Table Refrigerator			33 ~ 38 °F			9.8ft (3m)				
Doors	Capacity (Cu. Ft.)	Shelves	Cabinet Dimensions (inches / mm)			HP	Pans	Amps	Net Weight (lbs/kg)	Ship Weight (lbs/kg)	
			L	D*	H						
BAMT28	1	7	1	27 1/2"(699mm)	33 1/2"(851mm)	44"(1119mm)	1/5	1/6x6, 1/9x3	3.4	170 (77)	196 (89)
BAMT36	2	9.2	2	36 1/2"(923mm)	33 1/2"(851mm)	44"(1119mm)	1/5	1/6x15	3.4	196 (89)	227 (103)
BAMT48	2	13	2	48 1/2"(1227mm)	33 1/2"(851mm)	44"(1119mm)	3/8	1/6x18	6	229 (104)	284 (129)
BAMT60	2	16.5	2	60 1/2"(1533mm)	33 1/2"(851mm)	44"(1119mm)	3/8	1/6x24	6	278 (126)	331 (150)
BAMT72	3	20	3	72 1/2"(1839mm)	33 1/2"(851mm)	44"(1119mm)	3/8	1/6x30	6.1	328 (149)	374 (170)

*NOTE Standard cutting board adds 2 1/2" to depth of the unit.
BLUE AIR has the right to change specifications without further notice.